




## JOIST HANGER TYPE TOP M



With patented installation aid  
Patent no. 1014897




With installation aid

Art. No.	Dimensions [mm]					nH <sup>1</sup>	nN <sup>2</sup>	nH <sup>1</sup>	0769	EAN	Weight	Pallet	PU
	W	x	H	x	D								
30601TOPM	40	x	110	x	1.5	14	8	2	ETA-08/0264	122495	0.187	1200	50
30602TOPM	45	x	108	x	1.5	14	8	2	ETA-08/0264	122556	0.187	1200	50
30603TOPM	51	x	105	x	1.5	14	8	2	ETA-08/0264	122563	0.187	1200	50
30502TOPM	60	x	100	x	1.5	14	8	2	ETA-08/0264	122501	0.187	1200	50
30609TOPM	60	x	130	x	1.5	18	10	4	ETA-08/0264	122587	0.231	1200	50
30604TOPM	64	x	98	x	1.5	14	8	2	ETA-08/0264	122570	0.187	1200	50
30610TOPM	64	x	128	x	1.5	18	10	4	ETA-08/0264	122594	0.231	1200	50
30611TOPM	70	x	125	x	1.5	18	10	4	ETA-08/0264	122600	0.231	1200	50
30612TOPM	73	x	124	x	1.5	18	10	4	ETA-08/0264	122617	0.231	1200	50
30613TOPM	76	x	122	x	1.5	18	10	4	ETA-08/0264	122624	0.231	1200	50
30505TOPM	80	x	120	x	1.5	18	10	4	ETA-08/0264	122518	0.231	1200	50
30620TOPM	80	x	150	x	1.5	22	12	4	ETA-08/0264	122631	0.274	1200	50
30621TOPM	90	x	145	x	1.5	22	12	4	ETA-08/0264	122648	0.274	1200	50
30622TOPM	98	x	141	x	1.5	22	12	4	ETA-08/0264	122655	0.274	1200	50
30508TOPM	100	x	140	x	1.5	22	12	4	ETA-08/0264	122525	0.274	1200	50
30628TOPM	100	x	170	x	1.5	26	14	4	ETA-08/0264	122662	0.317	1200	50
30629TOPM	115	x	163	x	1.5	26	14	4	ETA-08/0264	122679	0.317	1200	50
30511TOPM	120	x	160	x	1.5	26	14	4	ETA-08/0264	122532	0.317	1200	50


● Standard sizes | nH<sup>1</sup> = number of holes in the flanges facing the main member | nN<sup>2</sup> = number of holes in the flanges facing the secondary member



## JOIST HANGER TYPE TOP M

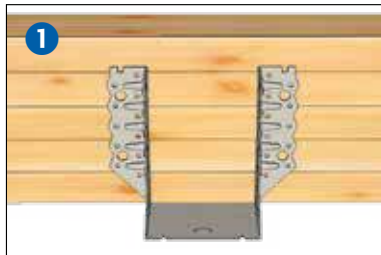

Position the patented installation aid at the bottom edge and press lightly on the top locator prongs to fix the joist hanger. The joist hanger pulls itself from the joist at the bottom edge and is therefore fixed precisely flush and at right-angles.

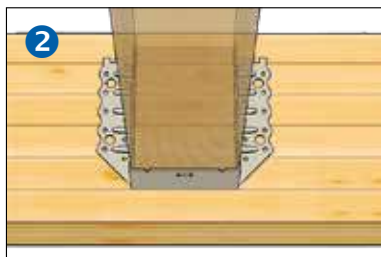

Installation in the middle of flush at the top  
If the secondary member is installed in the middle or flush at the top of the main member, both installation aids are pressed directly onto the datum level line. As a result, the Top M is aligned at right-angles and fixed without additional aids.

See advantages on page 9.



**GH screw**  
Approval ETA-13/0523 (page 90)



**Connector nails**  
Approval ETA-13/0523 (page 89)

